

BIPRO

SYSTEM & PRODUCT CERTIFICATES

-
-
-
-



PERFORMANCE WARRANTY

12

30



Excellent Anti-PID Performance

Anti

Wider Application



IP68 Junction Box



ELECTRICAL CHARACTERISTICS

n	n	n								
		(/)								
n		(/)								
n	n	(/A)								
n		(/)								
-		n (/A)								
	n	(%)								
:	n	1000 / ,	A 1.5,	25 .	n	n :0 +5 ,	n	n	:	3%
:	n	800 / ,	A 1.5, A	n	20 ,	n	1 /			


REAR SIDE POWER GAIN(REFERENCE TO 630W FRONT)

n				
/				
/				
/A				
/				
/A				


MECHANICAL CHARACTERISTICS

.	
n	n
n	
n	n
nn	

Electrical Performance

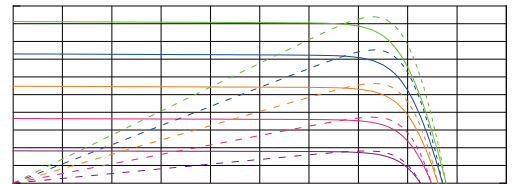


— — — — —

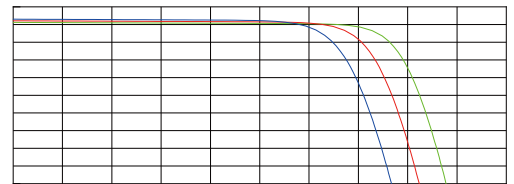

— — —

TECHNICAL DRAWINGS

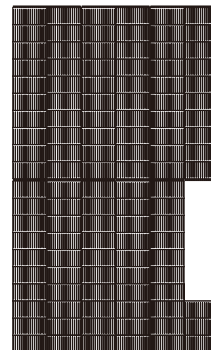

APPLICATION CONDITIONS

n	
n	
n	
n	
.	

TEMPERATURE CHARACTERISTICS

n	
n	
n	
n	n
()	

PACKING CONFIGURATION

n	n	(40)
-----	-----	-------



The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Suzhou Talesun Solar Technologies Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.